

FIGURE 1

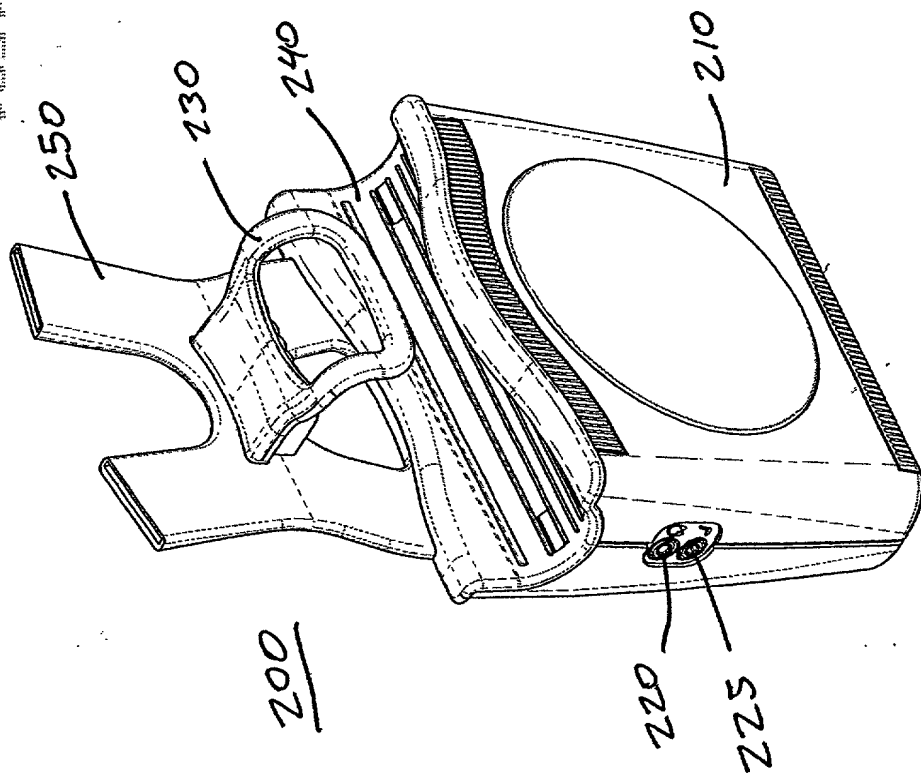


FIGURE 2A

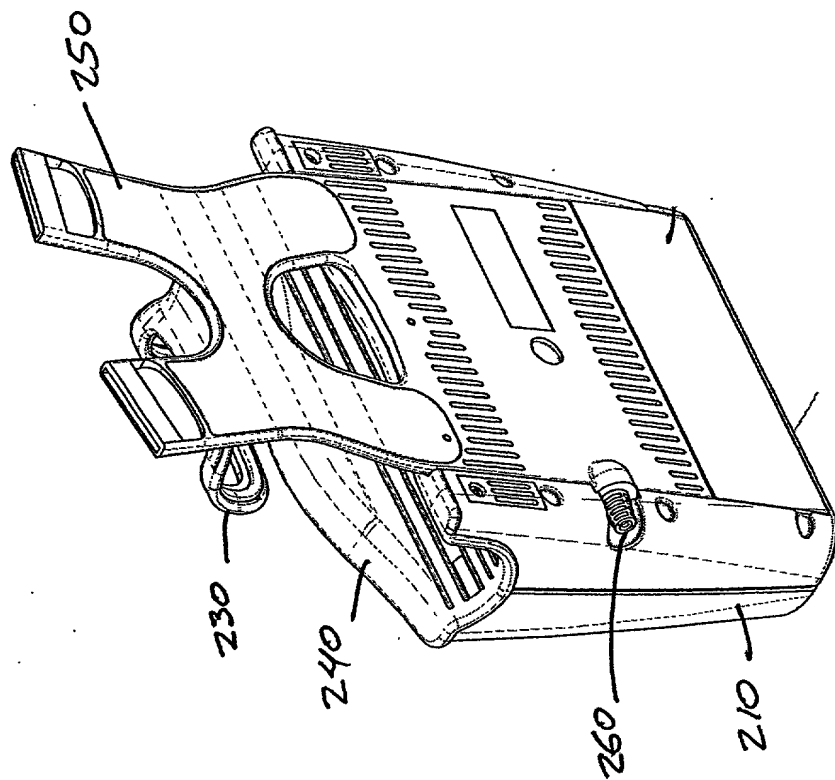
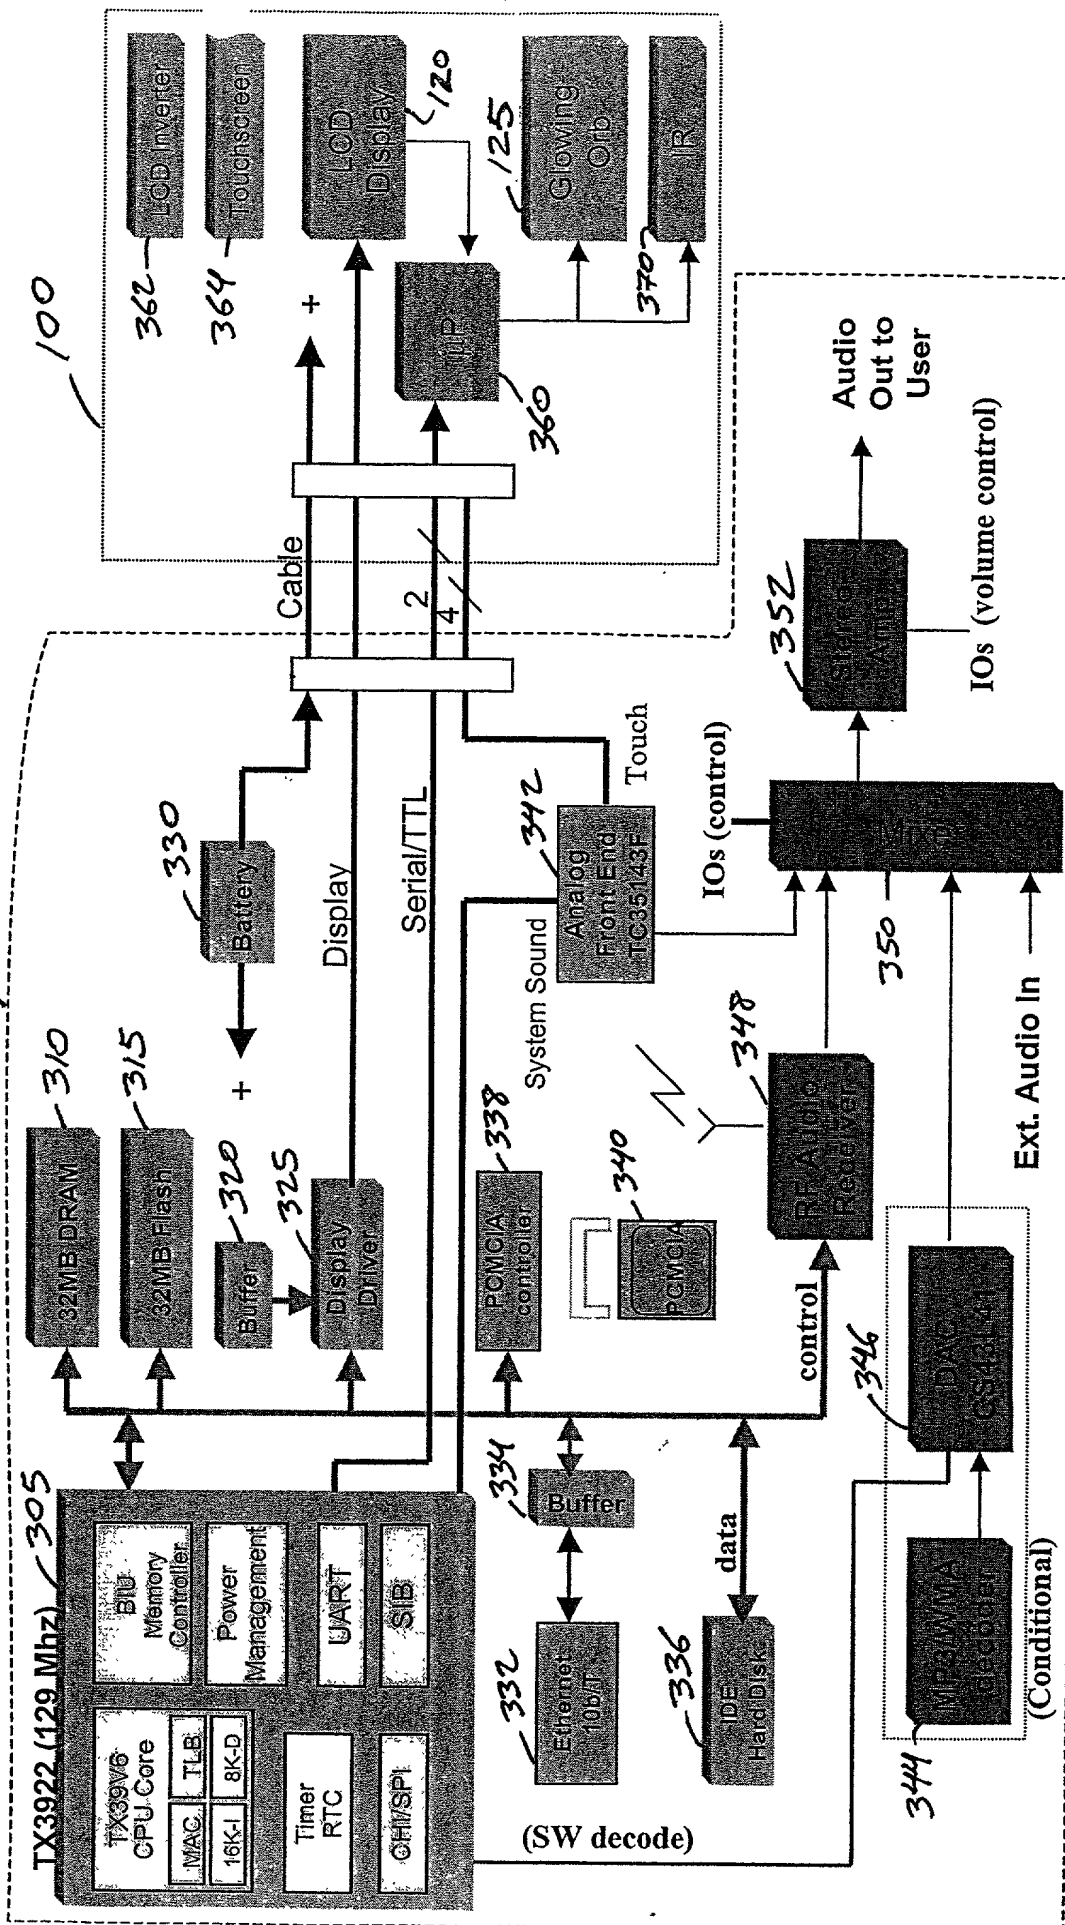


FIGURE 2B

FIGURE 3

300

200



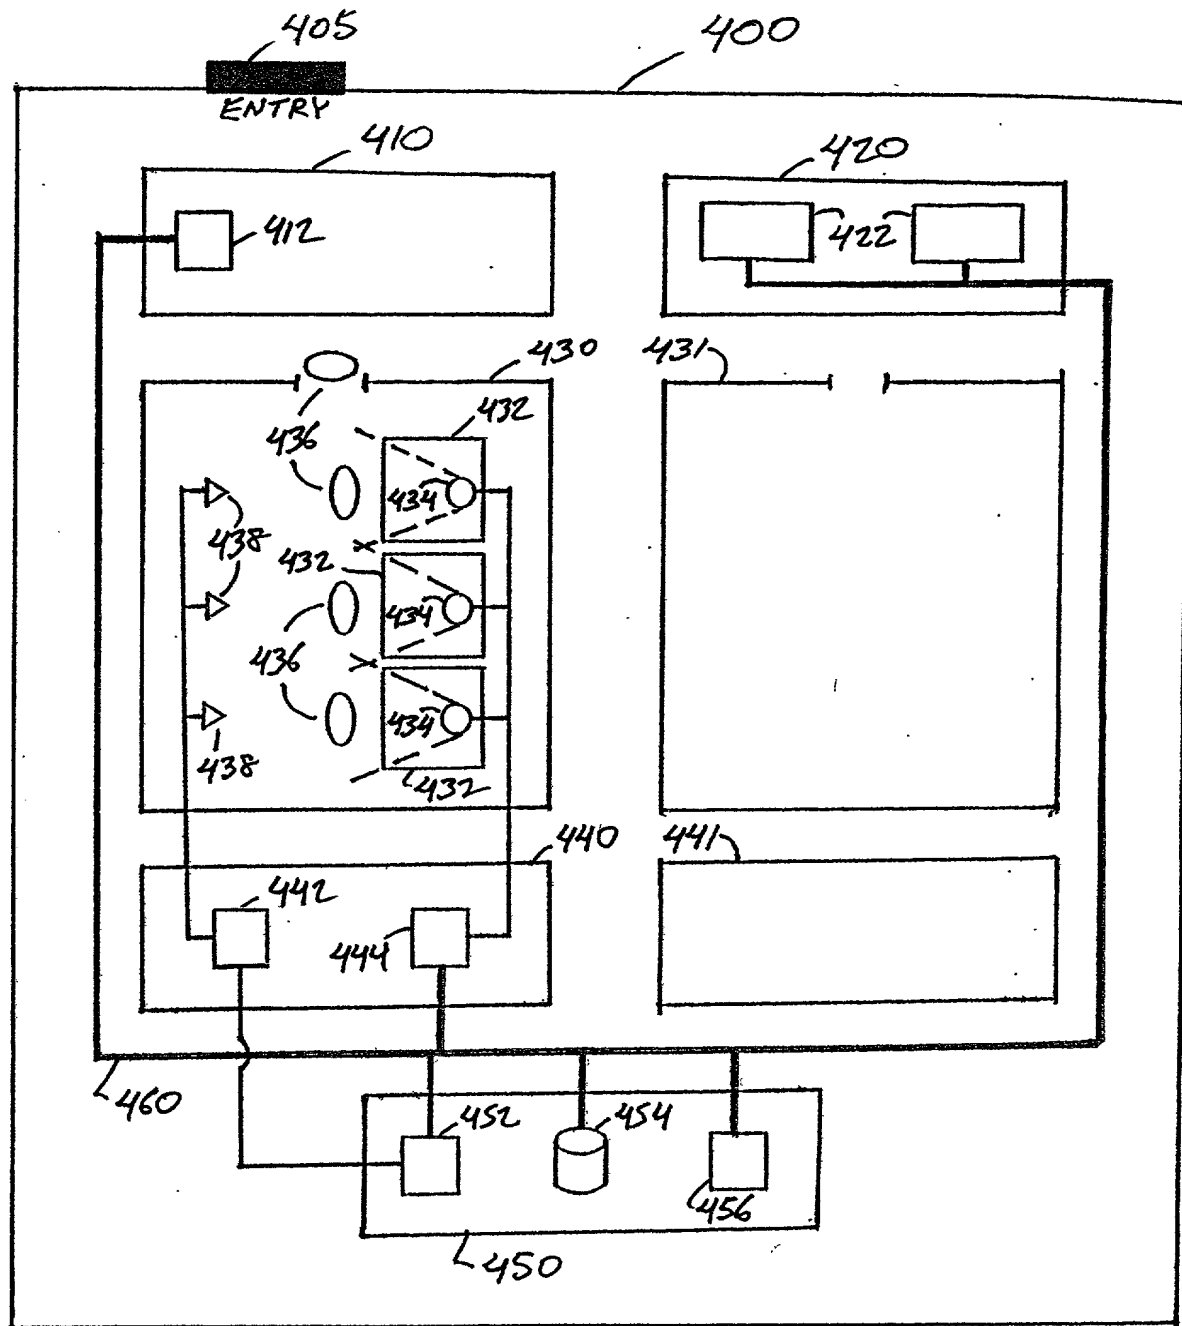


FIGURE 4

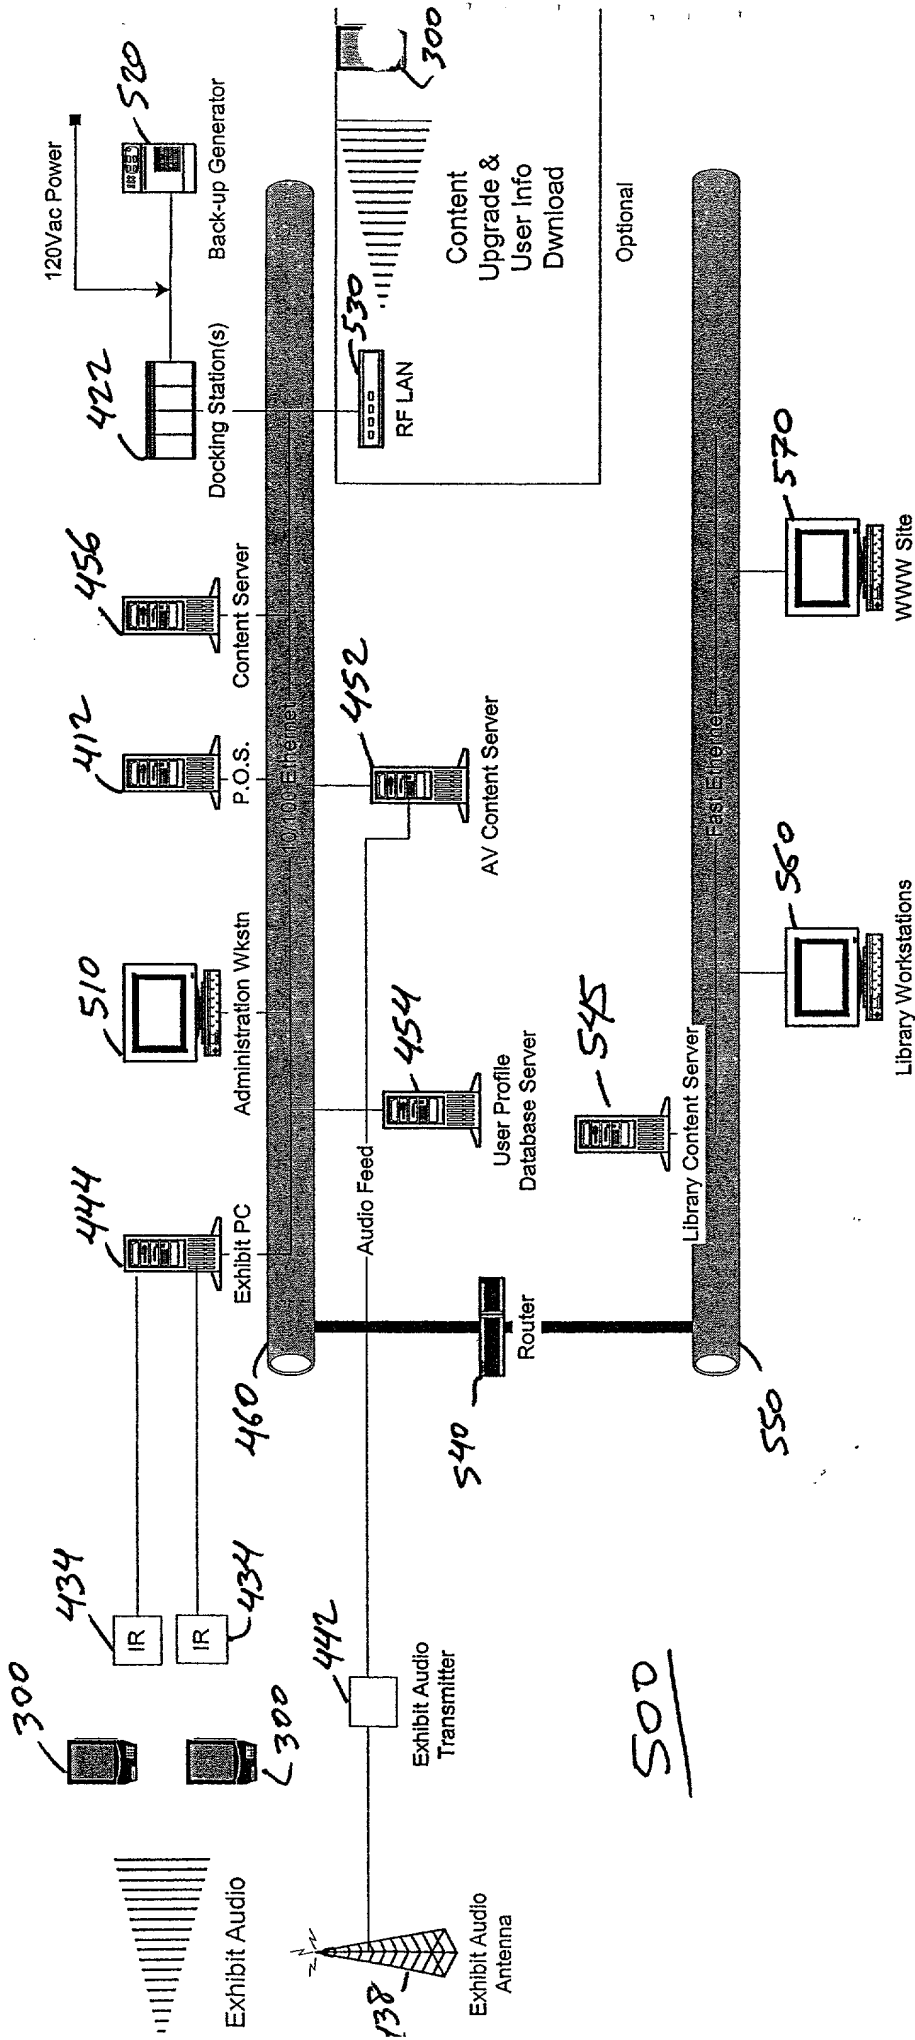


FIGURE 5

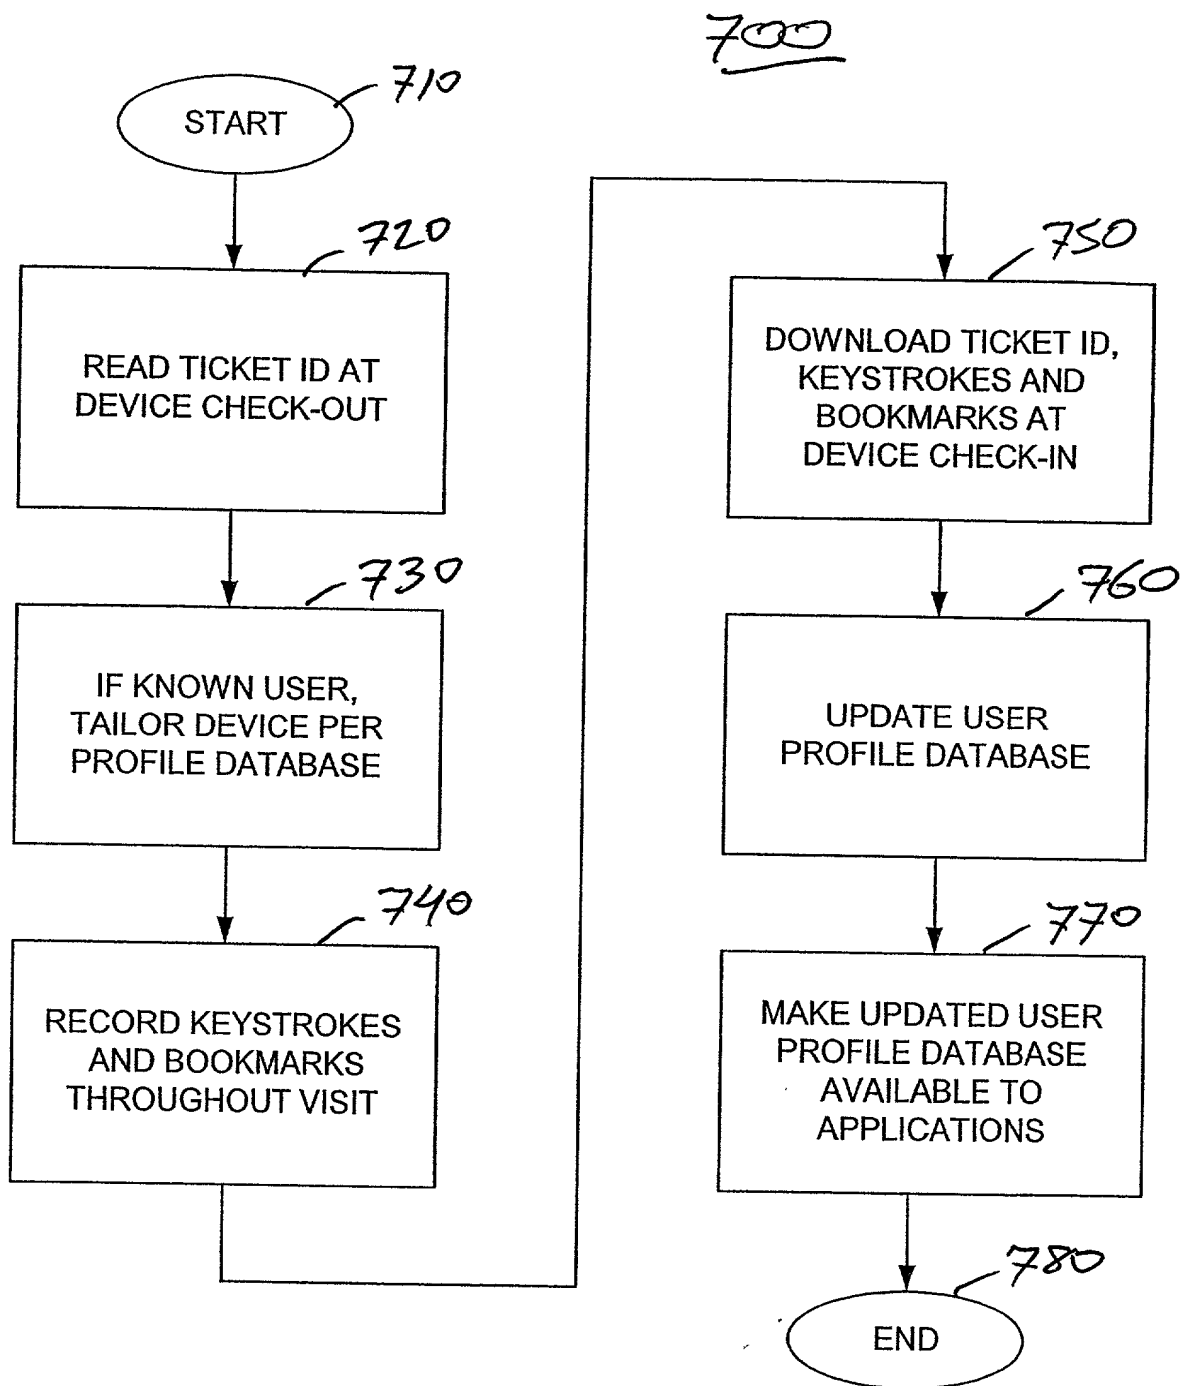


FIGURE 7

TESTING AT 2350

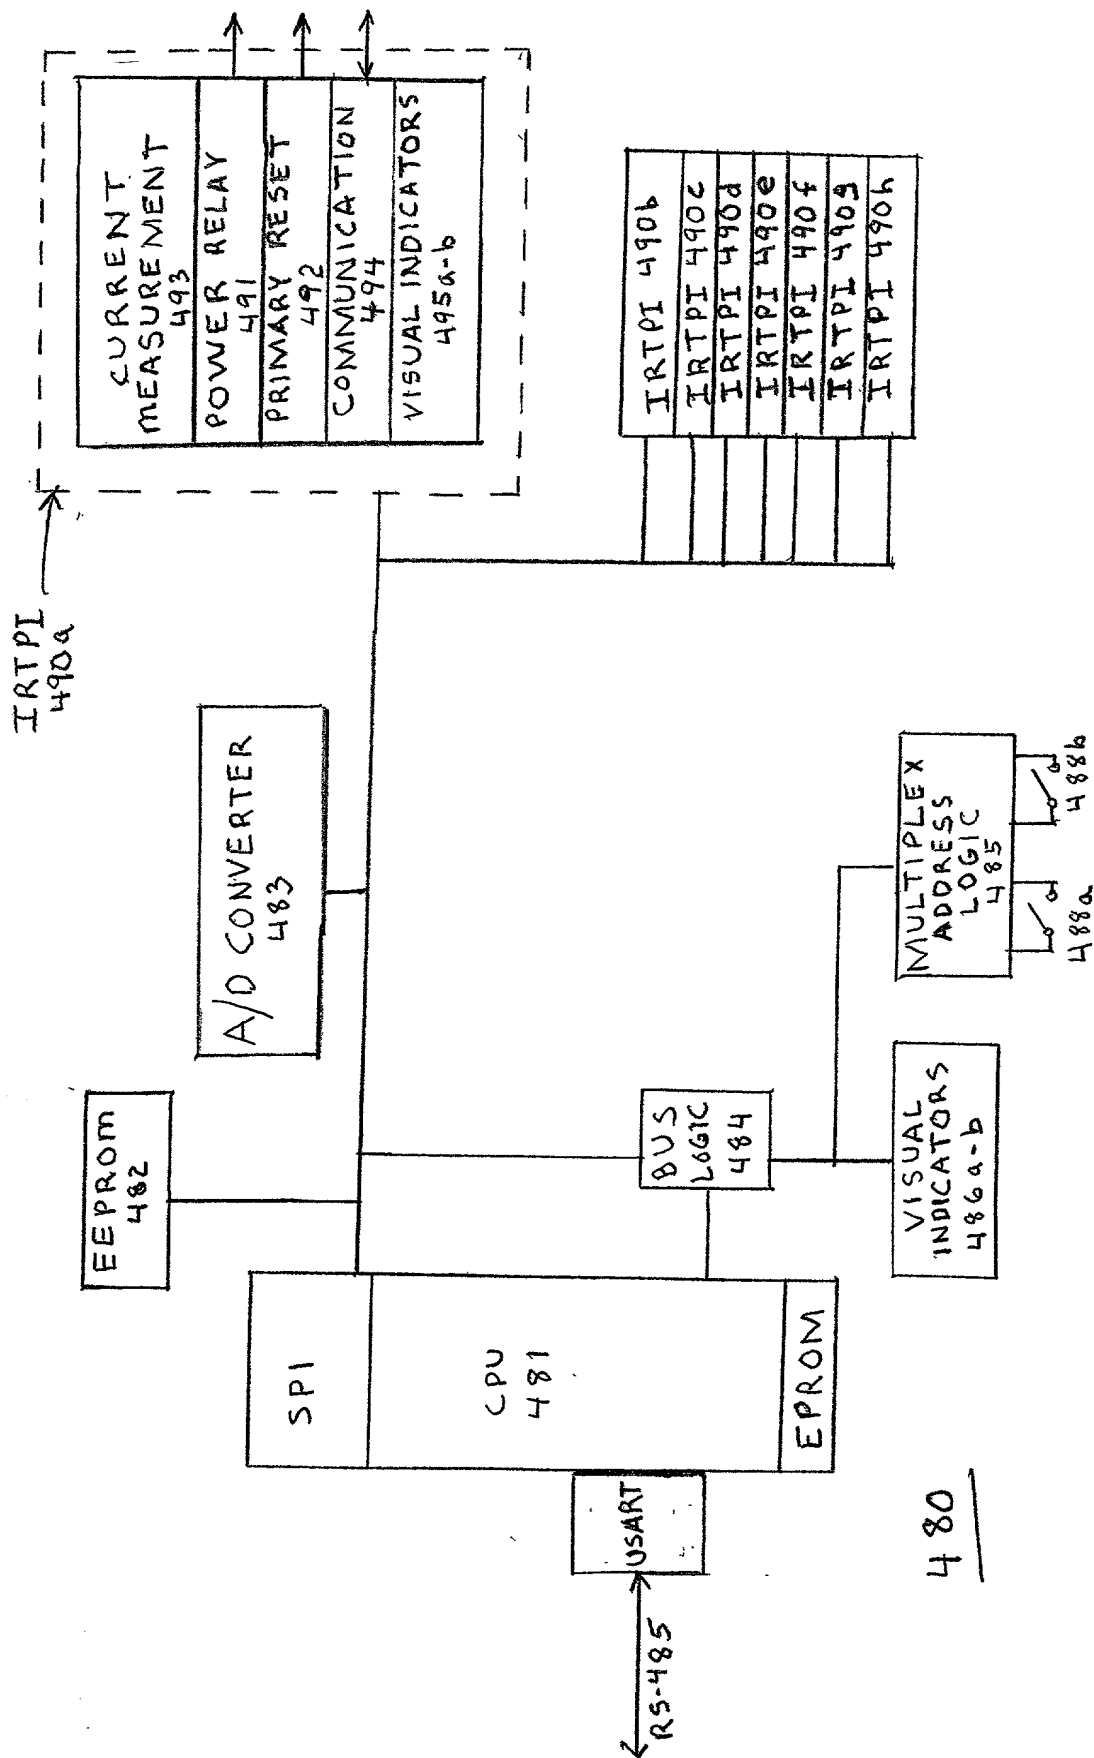


Fig 8

480

POSTER "STATES"



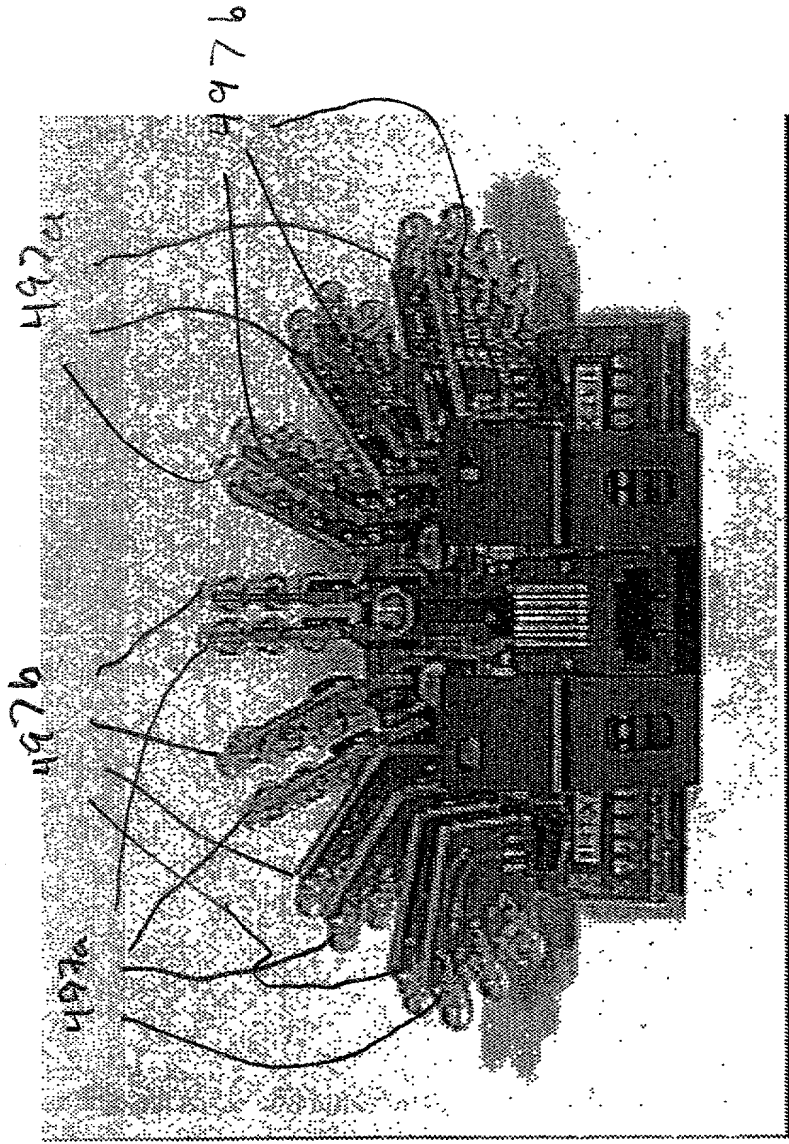


Fig 9

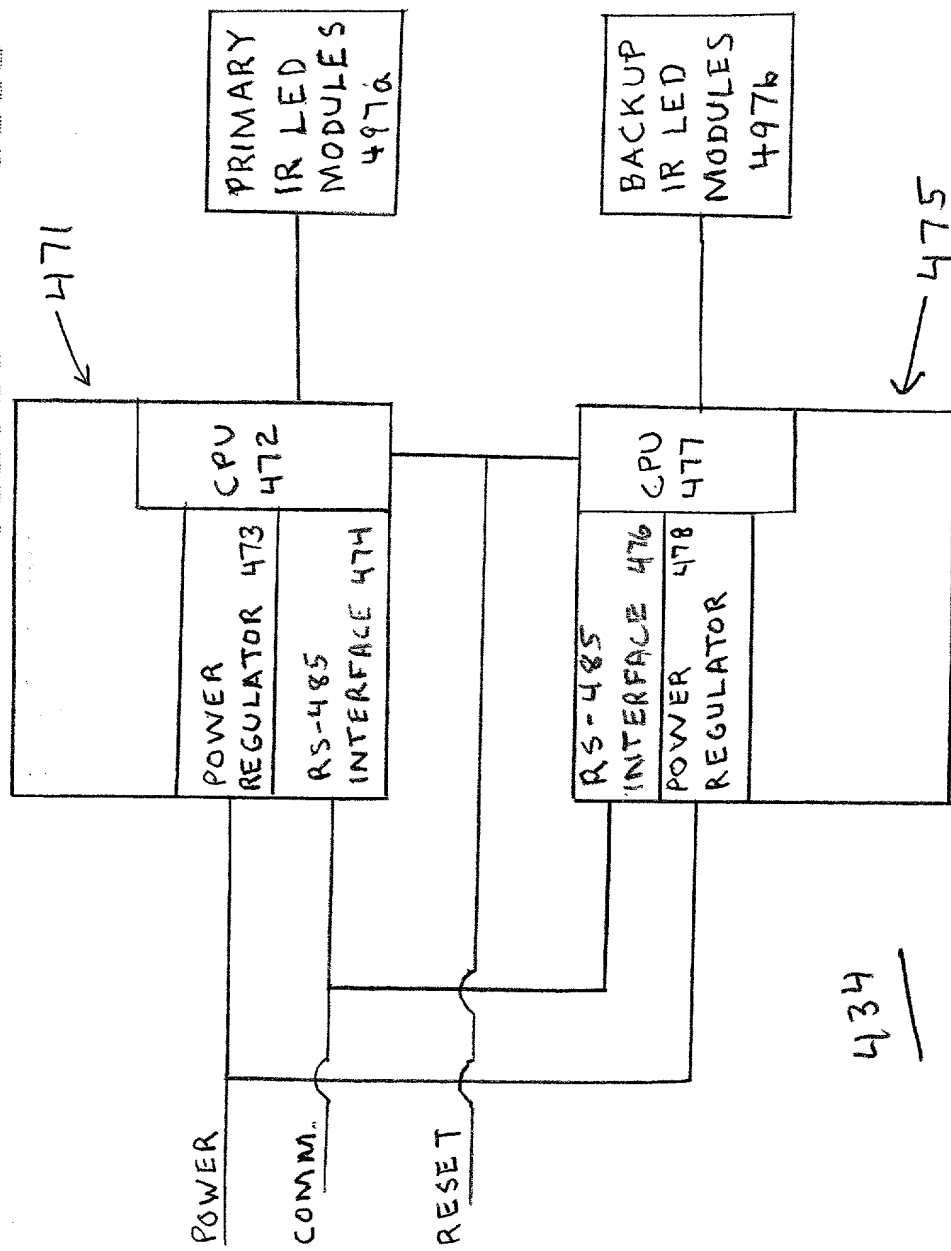

10

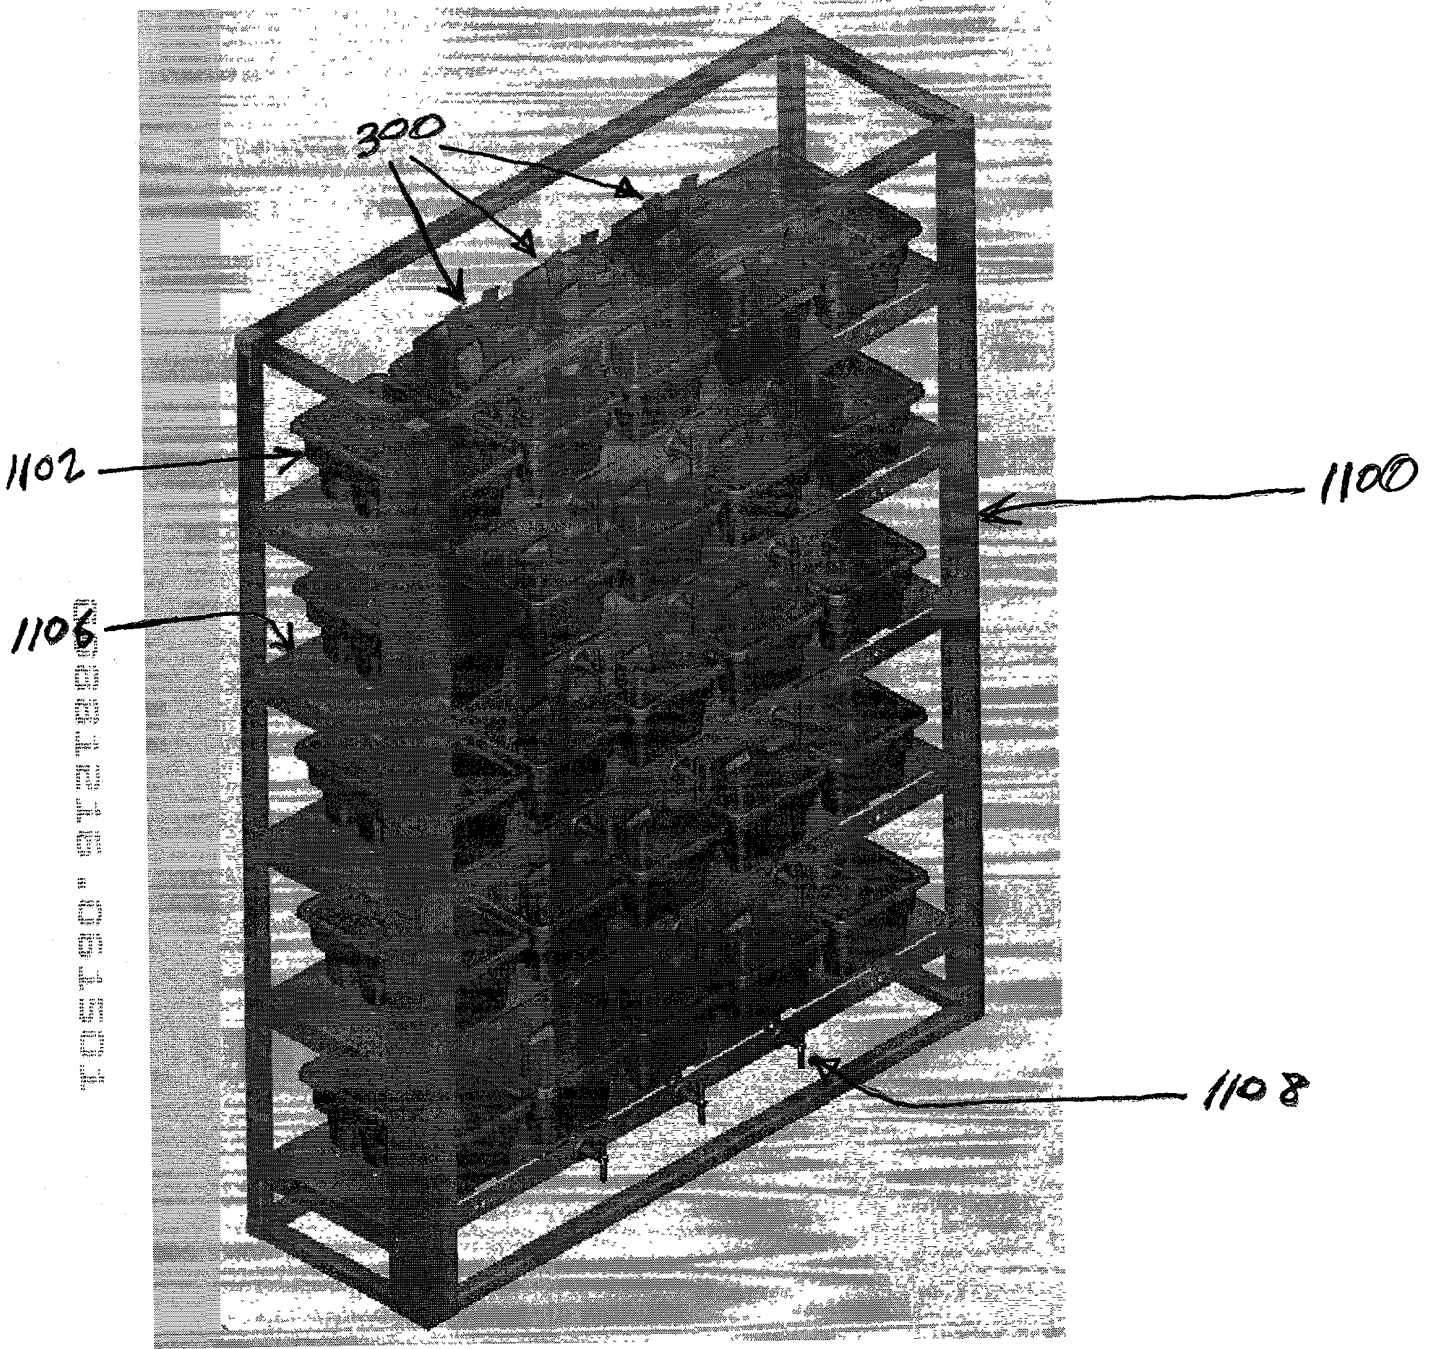

422

FIGURE 11

FIG. 12

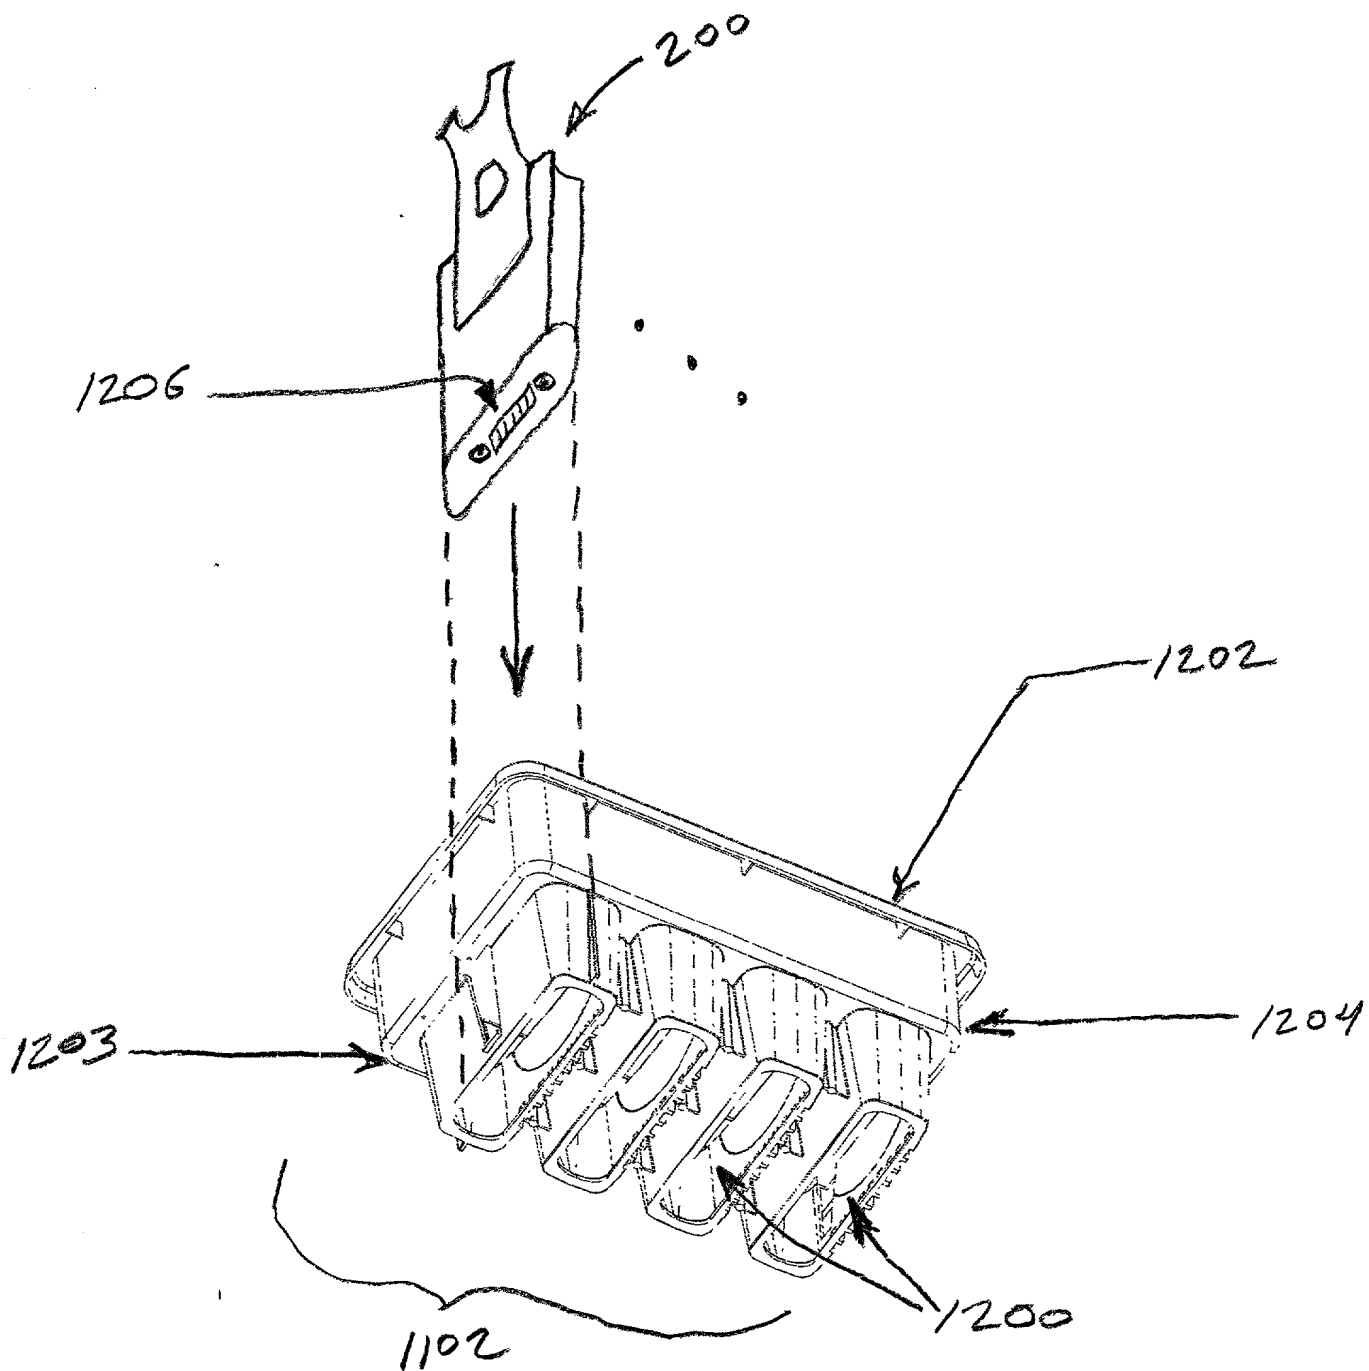


FIGURE 12

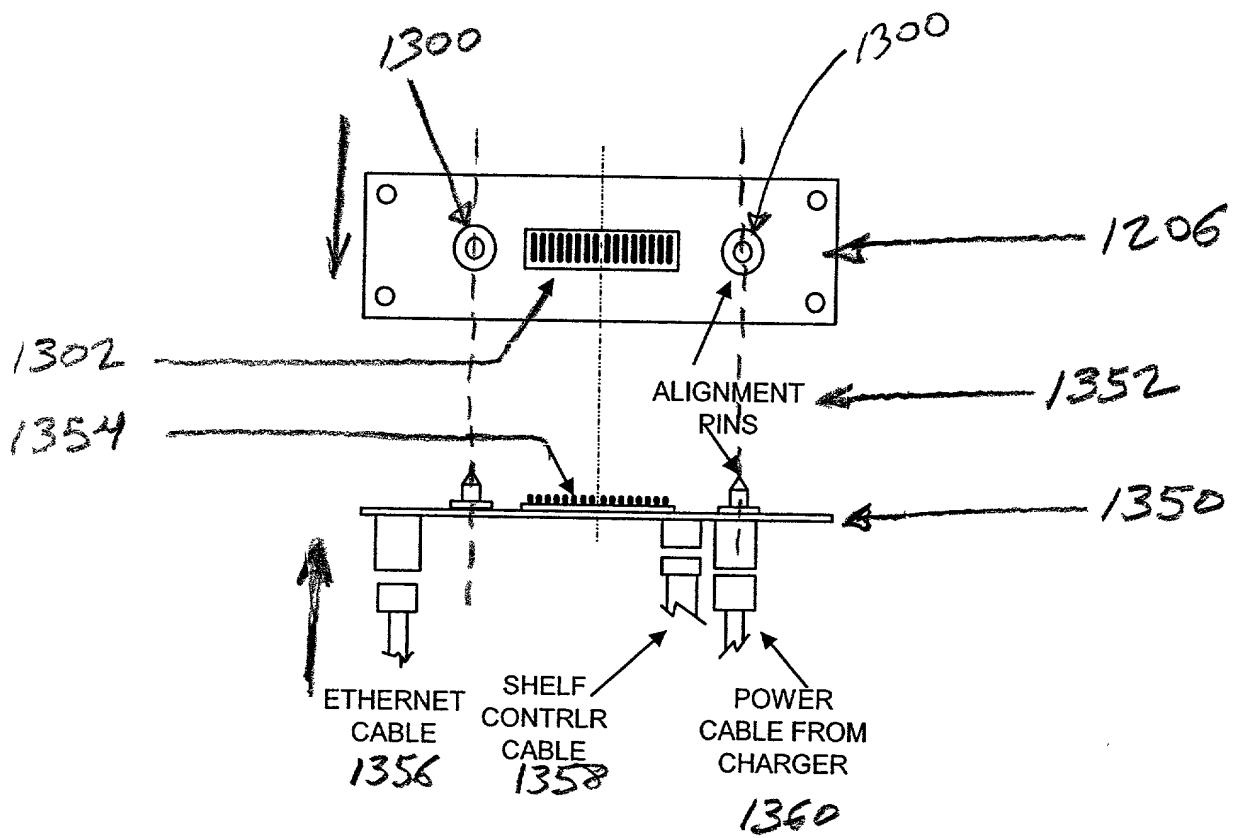


FIGURE 13


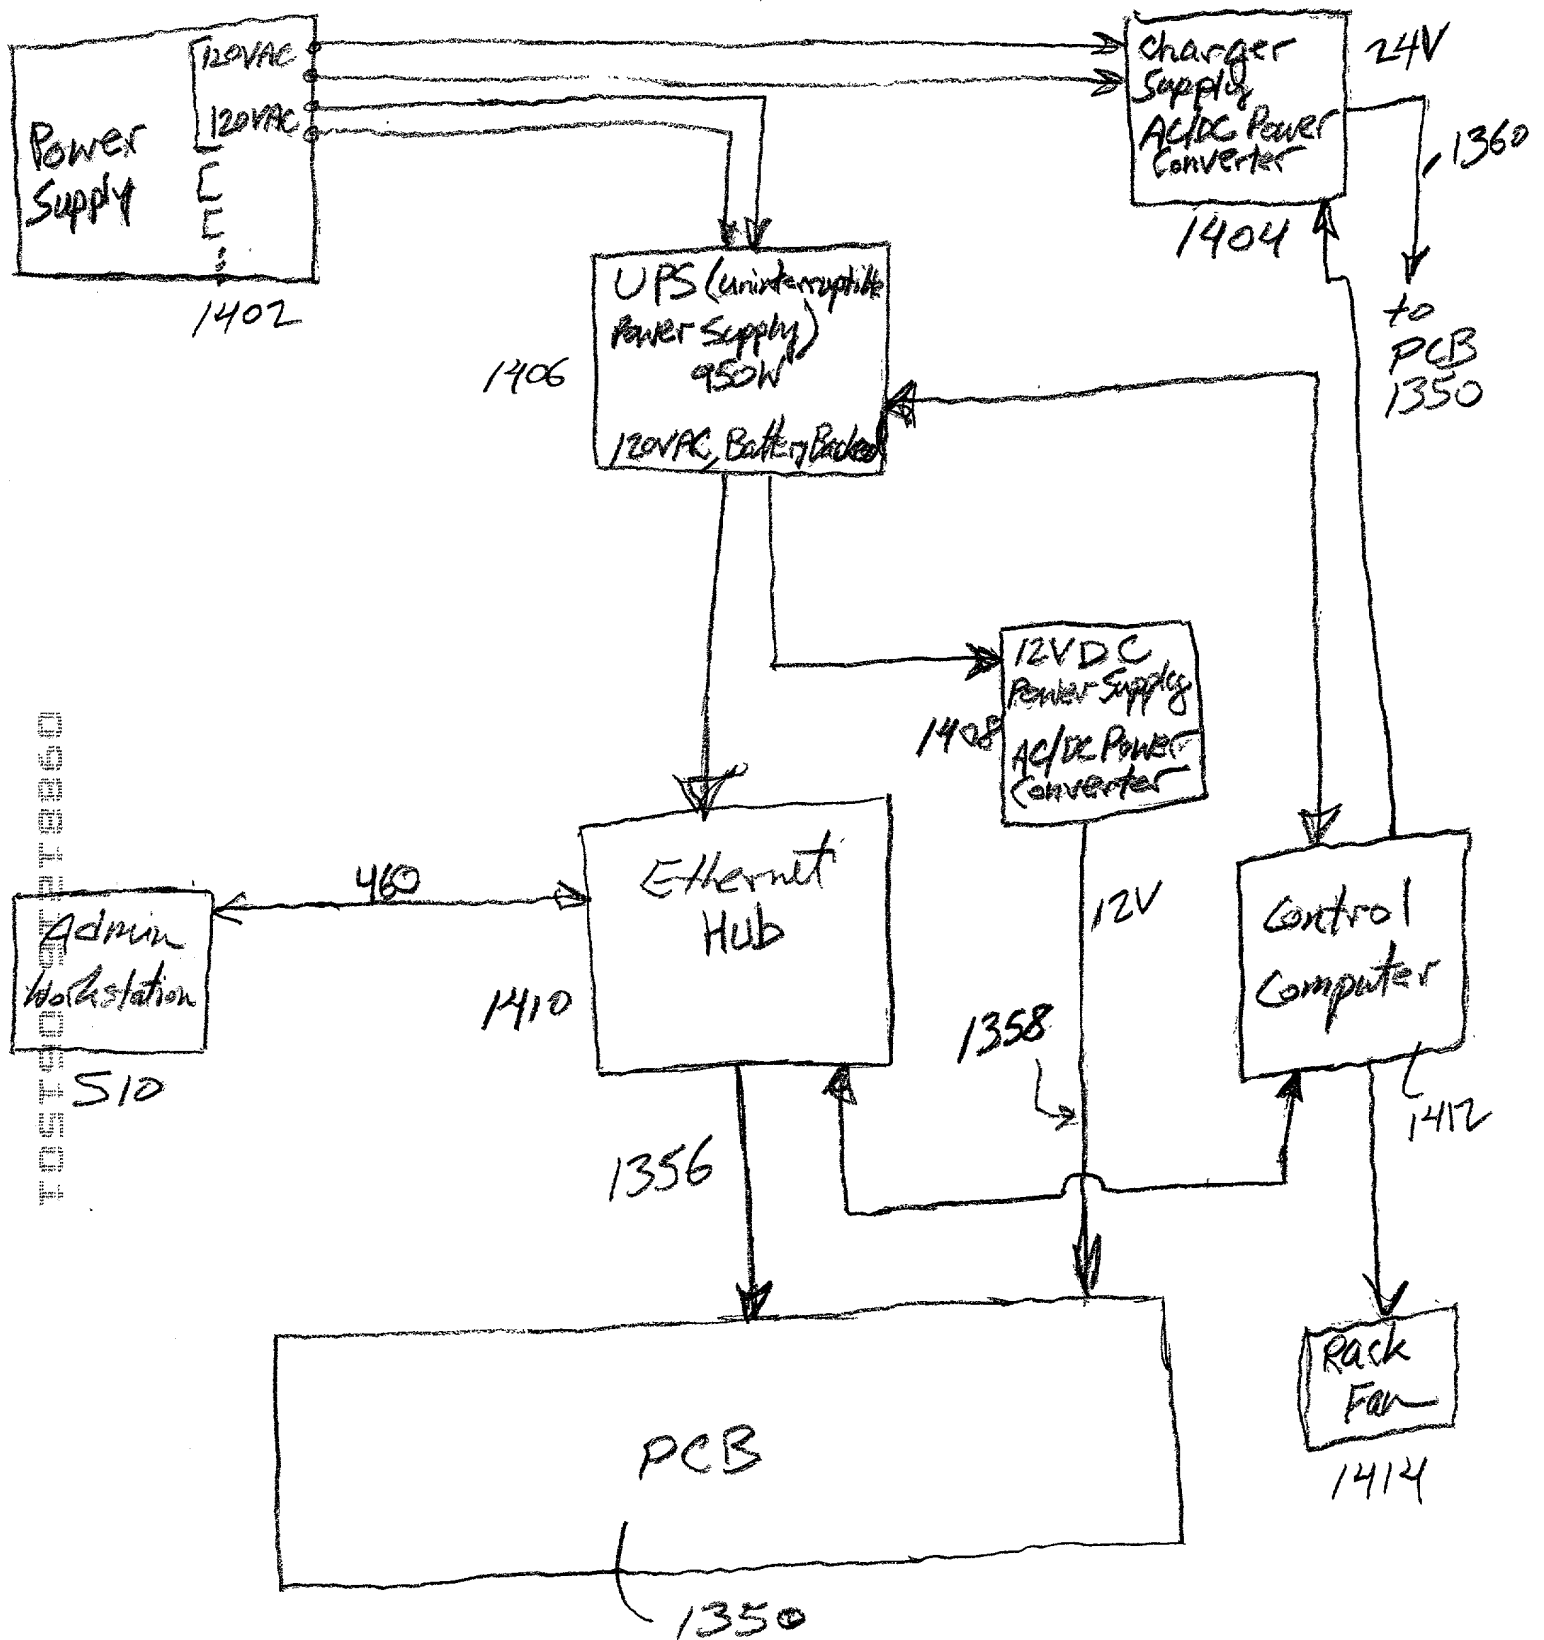


FIGURE 14


to 1402

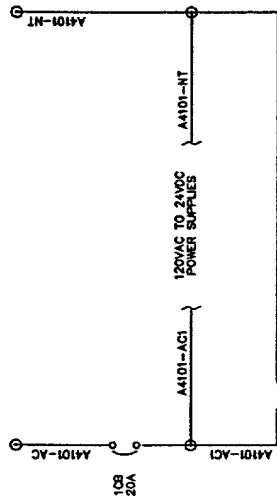

1406

to 1412

to 1408



1406

5VDC ADAPTER


REF DMC A4206
RS-232 SERIAL CABLE # 73-XXXX
SERIAL CABLE # 73-XXXX

TRIPP LITE SMART 1400VA
TRIPP LITE SMART-SOLO

"BASIC" RS-232 PORT
"SMART" RS-232 PORT

5VDC ADAPTER

1410

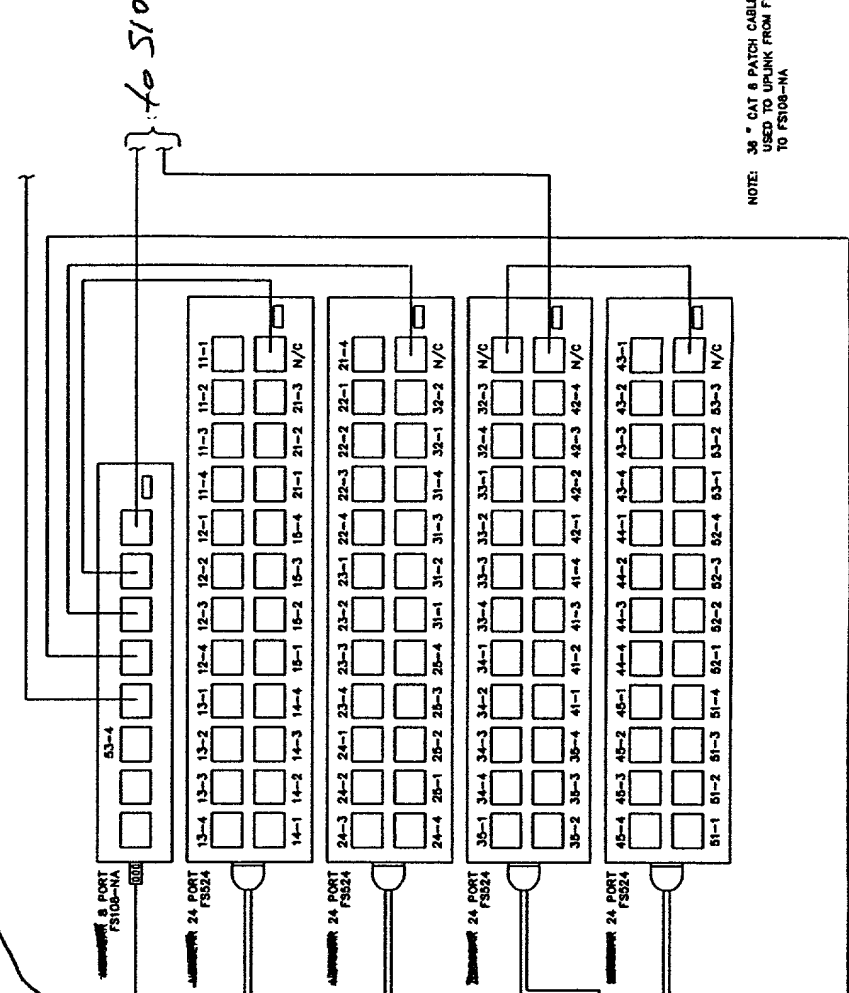

NOTE: 38" CAT 8 PATCH CABLE
USED TO UPLINK FROM FS524
TO FS108-NA

FIGURE 16